



PCT/GB 2002/005789.



INVESTOR IN PEOPLE

Rec'd PCT/PTO 06 JUL 2004

10/500739

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 31 JAN 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

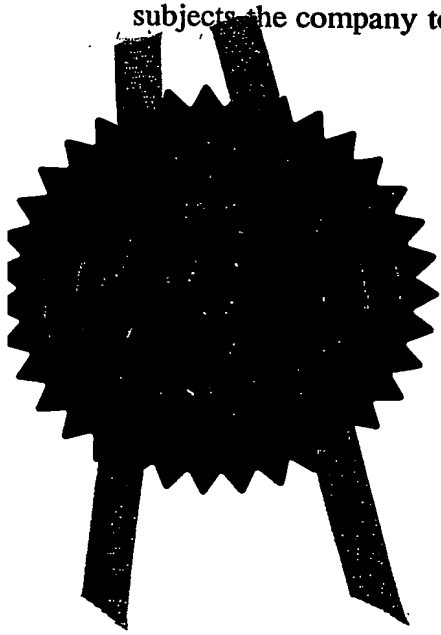

Signed

Dated 10 January 2003



Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	XA1615		
2. Patent application number (The Patent Office will fill in this part)	0200354.9		09 JAN 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	BAE SYSTEMS plc 6 Carlton Gardens London SW1Y 5AD		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		7914674004
4. Title of the invention	Improvements in or Relating to Underwater Vehicles		
5. Name of your agent (if you have one)	MACKETT, Margaret, Dawn		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	BAE SYSTEMS plc Group IP Department Lancaster House, P.O. Box 87 Farnborough Aerospace Centre Farnborough, Hampshire, GU14 6YU		
Patents ADP number (if you know it)	07914674002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77


9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 06

Claim(s) 02

Abstract 01

Drawing(s) 07 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature


M.D. Mackett

Date

08/01/2002

12. Name and daytime telephone number of person to contact in the United Kingdom Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

- 1 -

IMPROVEMENTS IN OR RELATING TO UNDERWATER VEHICLES

The present invention relates to improvements in or relating to underwater vehicles.

It is known to use a wire command link to connect an underwater vehicle
5 to its launch platform to provide an exchange of information between the underwater vehicle and the launch platform. The wire command link comprises a copper guide wire which is payed-out from the underwater vehicle as it moves through the water.

The guide wire system consists of two interconnected spools of guide
10 wire, one of which is mounted on the underwater vehicle and the other of which is mounted on the launch platform. The spool of guide wire on the launch platform pays-out through a weighted metal hosepipe which falls, due to gravity, to a position below the launch platform to prevent entanglement of the guide wire with the structure and/or propulsion system of the launch platform. The
15 spool of guide wire on the underwater vehicle unwinds and pays-out from the rear of the underwater vehicle.

Prior to launch of the underwater vehicle, the hosepipe is neatly coiled within a launch tube in the launch platform and is connected by a weak link to the rear of the underwater vehicle which is also located within the launch tube.
20 During the launch phase, the underwater vehicle pulls the hosepipe out of the launch tube until fully deployed, when the weak link separates and the hosepipe falls to a position below the launch platform. The guide wire then pays-out from both spools as the underwater vehicle and the launch platform operate and/or manoeuvre independently.

25 Whilst copper guide wire is very robust and can be easily jointed and insulated using conventional techniques, there is a move to replace copper guide wire with optical fibres or microcables. Such optical fibres and microcables are, however, quite fragile, and have bend radius limitations. Such optical fibres and cables require a specialised jointing process such as
30 fusion splice techniques.

In fusion splice techniques, lengths of optical fibres or microcables between 0.5 and 1m are required on each optical fibre or microcable to be available so that the fusion splice technique can be carried out effectively and efficiently. This means that, after the joint has been made, up to 2m of optical
5 fibre or microcable remains outside the coils of fibre or cable in the underwater vehicle and the launch platform where it is vulnerable to damage due to its fragility.

It is therefore an object of the present invention to provide means for providing storage between the launch platform and the underwater vehicle for
10 the fusion splice joint and any excess fibre or cable. This storage also provides protection for the fusion splice joint during the launch phase.

It is a further object of the present invention to control the bend radius of the optical fibre or microcable to ensure that communication can be maintained between the launch platform and the underwater vehicle and that the fusion
15 splice joint is deployed in a controlled manner during launch of the underwater vehicle.

In accordance with one aspect of the present invention, there is provided a splice chamber for accommodating and protecting a splice and excess optical cable between a launch platform and an underwater vehicle, the chamber
20 comprising:-

- two half portions joined longitudinally to define a storage chamber;
- means for attaching the chamber to the launch platform;
- means for attaching the chamber to the underwater vehicle; and
- means for separating the two half portions of the chamber.

25 Advantageously, the storage chamber is shaped to control the bend radius of the optical cable stored therein. Moreover, the storage chamber is also shaped to accommodate twists induced into the optical cable during launch of the underwater vehicle from the launch platform.

The means for separating the two half portions of the chamber may
30 comprise an active release device, for example, a spring-loaded device.

- 3 -

The means for attaching the chamber to the launch platform may comprise a hosepipe, the hosepipe being connected to the chamber by a swivel joint. The means for attaching the chamber to the underwater vehicle may include a weak link and/or the active release device. The weak link may
5 comprise a load-sensitive device, for example, a shear pin located in a retaining collar.

For a better understanding of the present invention, reference will now be made, by way of example only, to the accompanying drawings in which:-

Figure 1 illustrates a sectioned view through a splice chamber in
10 accordance with the present invention;

Figure 2 illustrates a section through the splice chamber of Figure 1 when connected to a hosepipe in a first embodiment;

Figure 3 is similar to Figure 2 but illustrates the splice chamber connected to a hosepipe in a second embodiment; and

15 Figures 4 to 8 illustrate the stages of deployment of the splice chamber as it releases the stored optical fibre or microcable.

In accordance with the present invention, the splice chamber comprises a double bellmouth chamber which is split longitudinally into two halves. The splice chamber is mounted between the outboard end of a hosepipe connected
20 to a launch platform and to an underwater vehicle. The radius of the bellmouth determines the bend radius of the enclosed optical fibre or microcable.

The attachment point of the splice chamber to the end of the hosepipe contains a spring loaded device which ejects the two halves of the splice chamber when it is possible to do so. The attachment point to the underwater
25 vehicle holds the two halves of the splice chamber closed and incorporates a load sensitive weak link or shear pin.

During the launch sequence, the underwater vehicle pulls the hosepipe out of the launch tube, the load being applied through the load-sensitive weak link or shear pin until the link or shear pin ruptures.

The splice chamber containing the splice and the excess optical fibre or microcable is released from the underwater vehicle and the two halves of the splice chamber are ejected by the spring and fall clear allowing the optical fibre or microcable guide wire to pay out from both the spool in the launch platform and the spool in the underwater vehicle.

Referring initially to Figure 1, a splice chamber 10 is shown. The chamber 10 comprises two portions 12, 14 which when placed together as shown define a space 16 in which optical fibre or microcable can be stored. The space 16 has a radius such that, when the optical fibre or microcable is inserted, there is no damage thereof due to bend radius limitations causing the optical fibre or microcable to snap or bend excessively.

Furthermore, the inner surfaces of the two portions 12, 14 are shaped such that a minimum bend radius is maintained while the optical fibre or microcable is entering or leaving the storage space 16.

Each portion 12, 14 comprises two half portions 12a, 12b and 14a, 14b respectively. Portions 12a, 12b are joined respectively to portions 14a, 14b at junctions, 15a, 15b in any appropriate way, for example, by welding.

When deployed, the chamber 10 divides in two along longitudinal line 18 to form two identical halves as described below with reference to Figures 4 to 8.

Holes 20, 22, 24, 26 may be provided in the chamber 10 to reduce weight if required, for example, if the portions 12, 14 are made of steel or other similar material. Holes 20, 22, 24, 26 also permit visual inspection of the optical fibre or microcable within the chamber 10.

Portion 12 of chamber 10 has a tapered neck portion 25a, 25b which ends in a lip 28a, 28b which extends over both half portions 12a, 12b as shown. Similarly, portion 14 of chamber 10 has a neck portion 27a, 27b in which is formed holes 29a, 29b for receiving a shear pin as described below. It will be understood that the suffices 'a' and 'b' refer to the two half portions of the chamber 10 when divided along longitudinal line 18.

Figure 2 illustrates a splice chamber 10 (shown generally for clarity) connected to a hosepipe 30 at one end and to an underwater vehicle (not shown in detail) at the other end. A swivel joint 32 is provided at the end of the hosepipe 30 to allow relative movement between the splice chamber 10 and the hosepipe 30. A housing 34 is shaped to partially sit within the swivel joint 32 and allows unhindered access for the optical fibre or microcable (not shown). The end of the housing 34 remote from the swivel joint 32 is attached to an inner housing 36 by means of pins or screws 38. Inner housing 36 abuts a member 40 which is biased in position against the action of a spring (not shown for clarity) located in recess 42 formed between inner housing 36 and member 40. An outer housing 44 surrounds member 40 and inner housing 36 and is connected to inner housing 36 by screws or pins 46. Housing 44 has a lip 48 which retains lip 28a, 28b formed neck portion 25a, 25b of the splice chamber 10.

Neck portion 27a, 27b of the splice chamber 10 is connected to a collar 50 via a shear pin 52 located in one of holes 29a, 29b. Also attached to the housing 50 is a ball joint (not shown) which connects to the underwater vehicle (also not shown).

Figure 3 is similar to Figure 2 and parts which are identical are referenced the same. As before, the splice chamber 10 is connected to a hosepipe 30 via neck portion 25a, 25b and to an underwater vehicle (not shown) at the other end via neck portion 27a, 27b. A swivel joint 32 is provided at the end of the hosepipe 30. The swivel joint 32 surrounds an inner housing 56 which is attached to housing 44 by means of screws or pins 58 and supports member 40 against the action of a spring (not shown for clarity) located in space 60. As before, housing 44 has a lip 48 which engages lip 28a, 28b of neck portion 25a, 25b of splice chamber 10. Neck portion 27a, 27b of the splice chamber 10 is connected to the underwater vehicle (not shown) via collar 50 and shear pin 52 as before.

In both the embodiments of Figures 2 and 3, optical fibre or microcable attached to the launch platform (not shown) via the hosepipe 30 passes through housing 34 (Figure 2) and 56 (Figure 3), through inner housing 36 (Figure 2),

- 6 -

through member 40 and into the splice chamber 10. Here, the splice and excess optical fibre or microcable left over from the fusion splice operation is stored and protected prior to and during the underwater vehicle deployment. The splice, optical fibre or microcable is wound round the inside of space 16 and then passes through to the underwater vehicle via neck portion 27a, 27b and ball joint (not shown).

Figures 4 to 8 illustrate how the splice chamber 10 is released when it is no longer needed with reference to the Figure 3 embodiment. In each of Figures 4 to 8, the swivel joint 32 and hosepipe 30 are not shown. Figure 4 illustrates the prior to hose separation position similar to Figure 3. As the underwater vehicle moves away from its launch platform, the shear pin 52 breaks, when the forces are of the correct magnitude, and releases neck position 27a, 27b of the splice chamber 10 (Figure 5). It will be appreciated that collar 50 with shear pin 52 retains neck portions 27a, 27b closed, and once the pin 52 breaks, neck portion 27a, 27b is free to open along line 18 (Figure 1) pivoting at the junction of lip 28a, 28b and lip 48. As the underwater vehicle moves further away (Figure 6), the two halves of the splice chamber 10 move further outwards due to the action of the spring (not shown) in space 60) until they are almost free (Figure 7), and then detach from the housing 44 (Figure 8) leaving the housing 56, housing 44 and member 40 in place.

CLAIMS

1. A splice chamber for accommodating and protecting a splice and excess optical cable between a launch platform and an underwater vehicle, the chamber comprising:-
 - 5 two half portions joined longitudinally to define a storage chamber;
 - means for attaching the chamber to the launch platform;
 - means for attaching the chamber to the underwater vehicle; and
 - means for separating the two half portions of the chamber.
2. A chamber according to claim 1, wherein the storage chamber is shaped
10 to control the bend radius of optical cable stored therein.
3. A chamber according to claim 1 or 2, wherein the storage chamber also provides protection for the splice and optical cable both during storage and during the launch phase.
4. A chamber according to any one of claims 1 to 3, wherein the storage
15 chamber is shaped to accommodate twists induced into the optical cable during launch of the underwater vehicle from the launch platform.
5. A chamber according to any one of claims 1 to 4, wherein the means for separating the two half portions of the chamber comprises an active release device.
- 20 6. A chamber according to claim 5, wherein the active release device comprises a spring-loaded device.
7. A chamber according to any one of the preceding claims, wherein the means for attaching the chamber to the launch platform comprises a hosepipe, the hosepipe being connected to the chamber by a swivel joint.
- 25 8. A chamber according to any one of the preceding claims, wherein the means for attaching the chamber to the underwater vehicle includes a weak link.

- 8 -

9. A chamber according to claim 8, wherein the weak link comprises a load-sensitive device.

10. A chamber according to claim 9, wherein the load-sensitive device comprises a shear pin located in a retaining collar.

5 11. A chamber according to claim 10, wherein the shear pin ruptures to release the retaining collar and hence the two half portions of the chamber at an appropriate time.

12. A splice chamber substantially as hereinbefore described with reference to the accompanying drawings.

10

15

20

- 9 -

ABSTRACT**IMPROVEMENTS IN OR RELATING TO UNDERWATER VEHICLES**

Described herein is a splice chamber (10) for accommodating excess optical cable obtained when making a fusion splice connection between two
5 reels of cable. The chamber (10) comprises two portions (12a, 12b, 14a, 14b) which define a space (16) for the optical cable. The chamber (10) is constructed to divide into two longitudinal half portions along a longitudinal line (18), but each end is retained until conditions are suitable for release. The space (16) inside of the chamber (10) is shaped to determine the bend radius
10 for the enclosed optical cable and protects the cable during storage and handling. When a predetermined force is applied to one end (27a, 27b) of the chamber (10), the two longitudinal half portions separate to release the optical cable stored therein, pivoting about the other end (28a, 28b).

15

(Fig. 1)

20

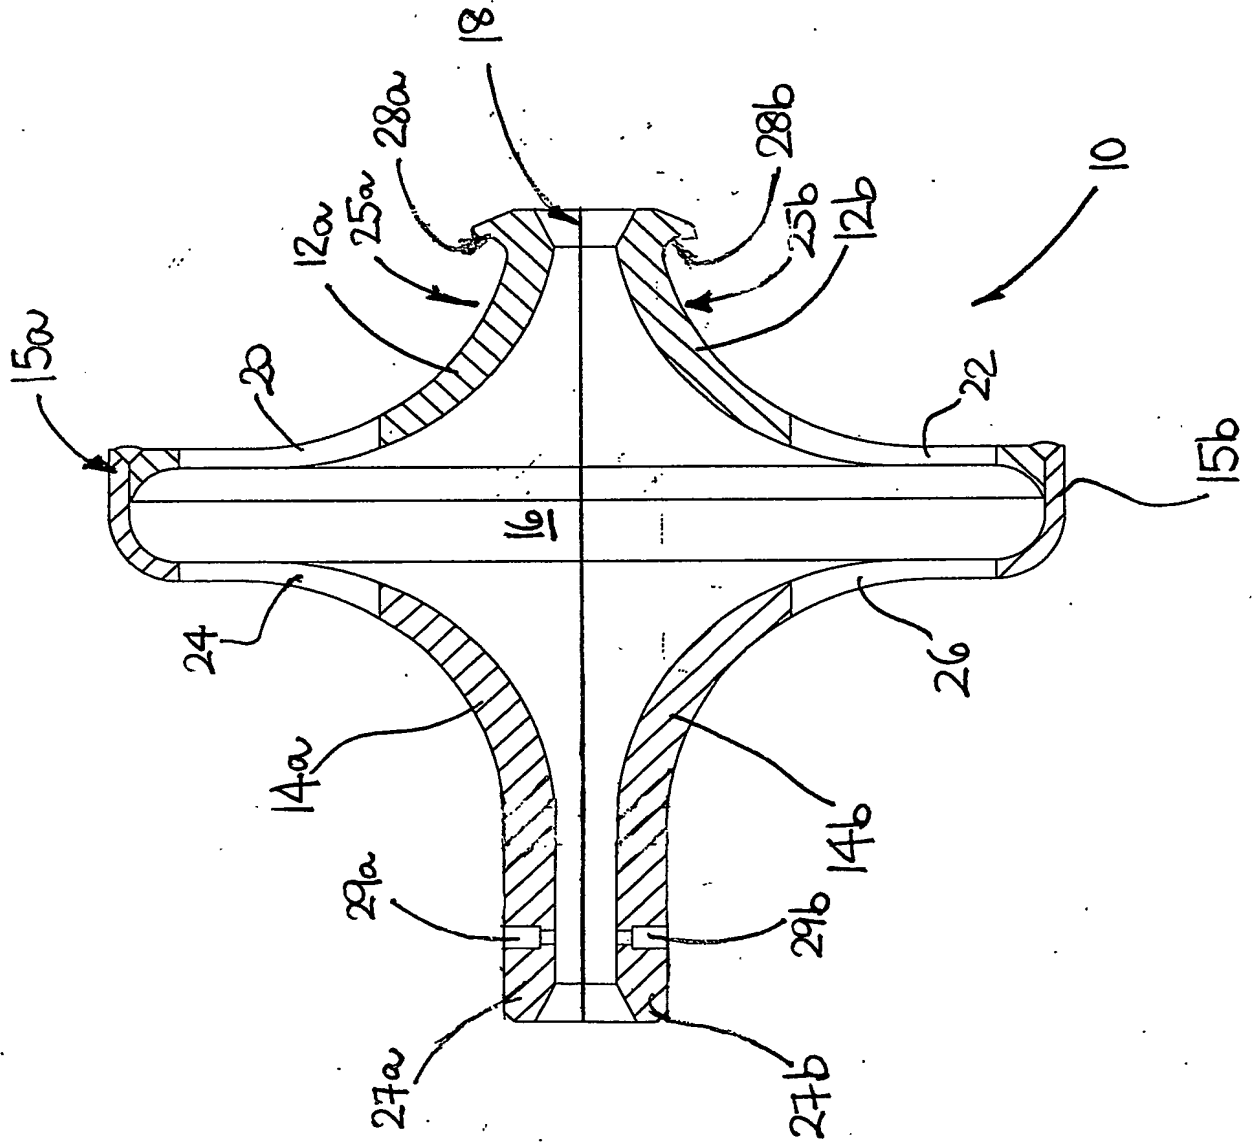


FIG. 1

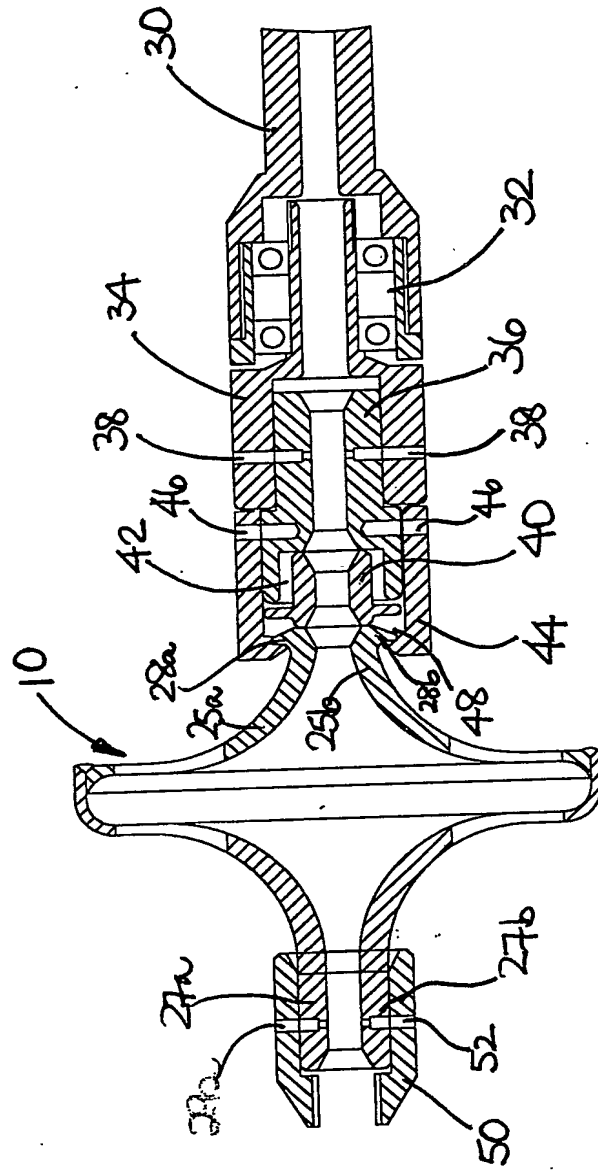


FIG. 2

3/7

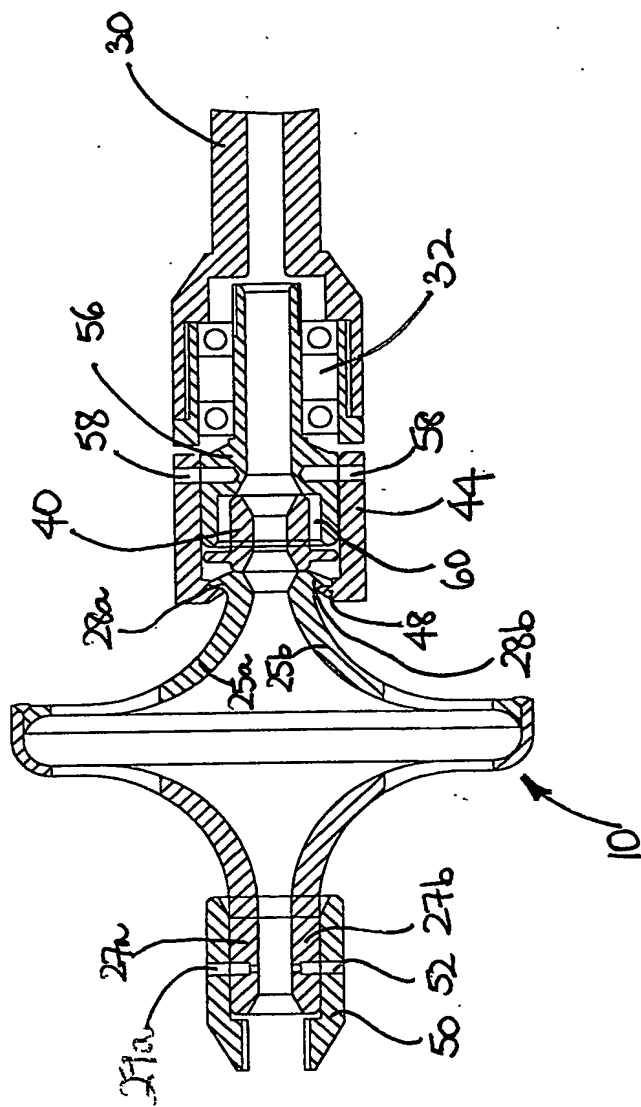


FIG. 3

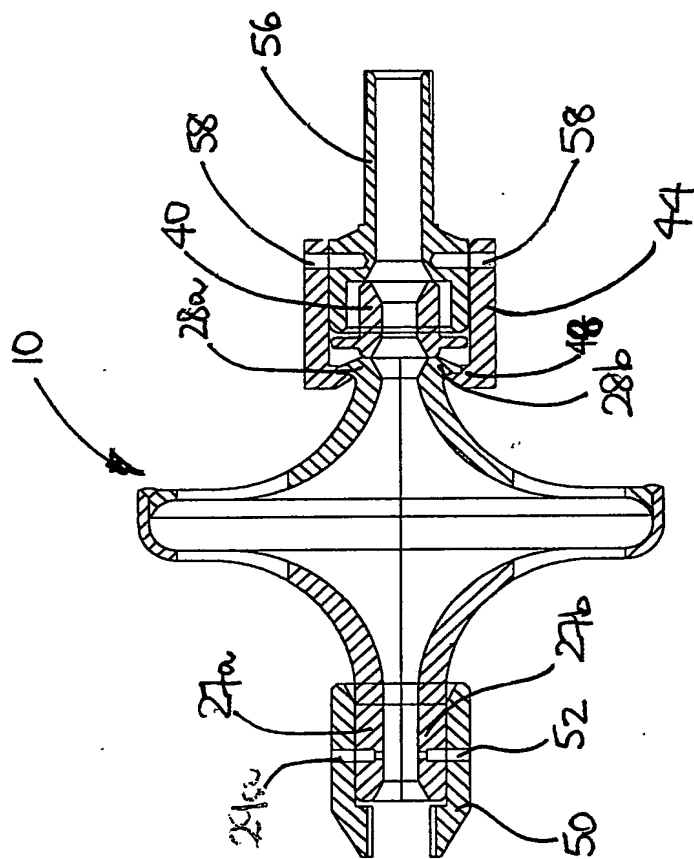


FIG. 4

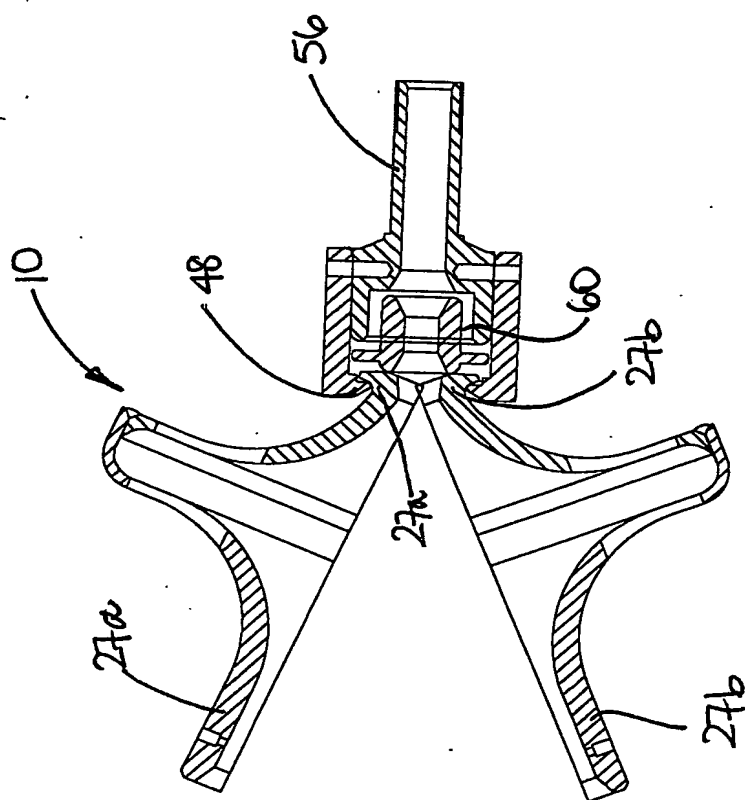


FIG. 5

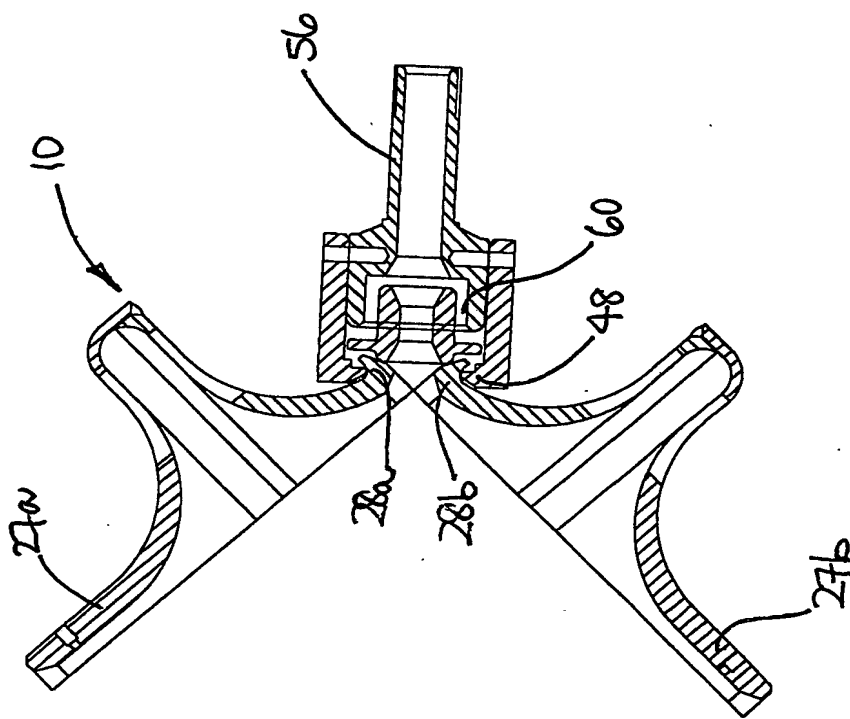


FIG. 6

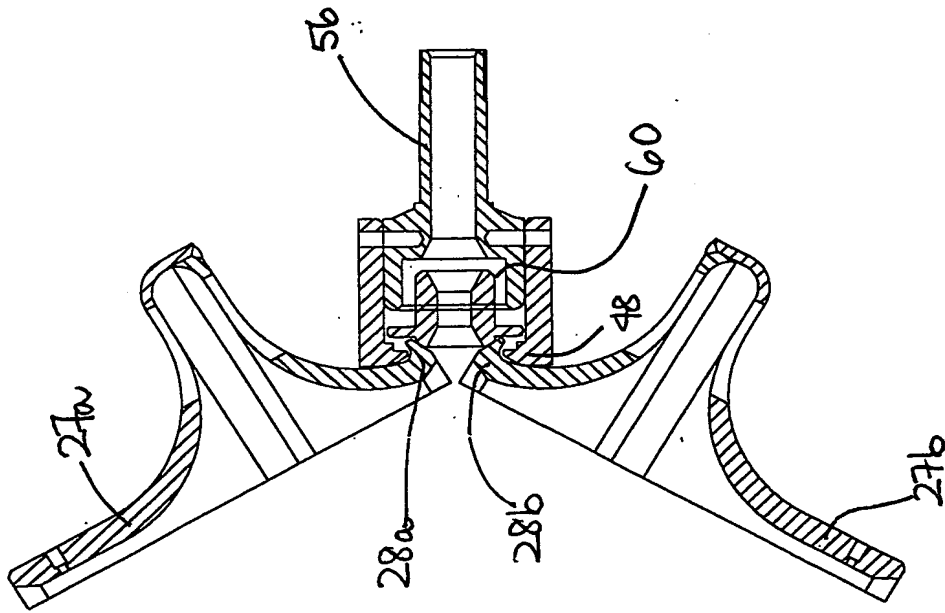


FIG. 7

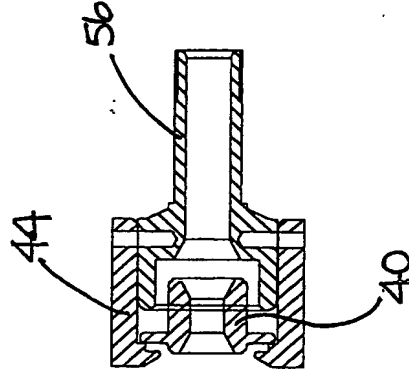


FIG. 8